




NG 6 Hidrolik Valf

1995-2020

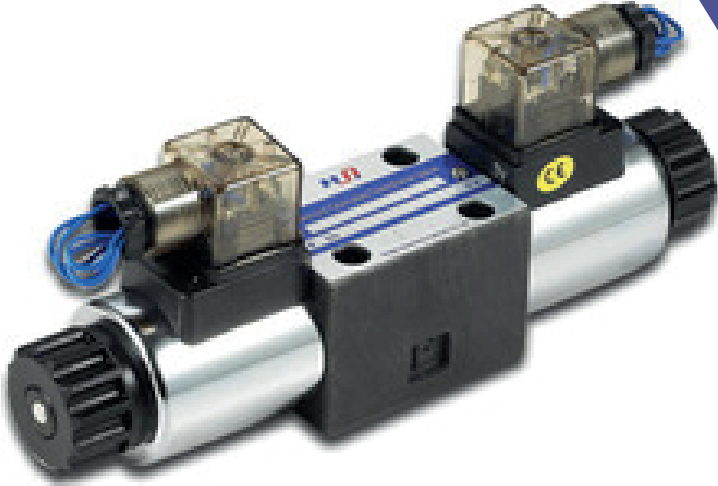


DWG6 series directional control valves are solenoid operated directional spool valves ,these valves are used to the start ,stop and direct flow.

Technical data


Size	6
Max.flow rate(L/min)	60
Operating pressure(MPa)	A、 B、 P oil port 31.5
	T oil port 16
Without Handle/With HandleWeight(KGS)	1.6/2.2
	2.2/2.8
Valve body (Material) Surface treatment	casting phosphating surface

Characteristic curves (measured with HLP46 , Voil=40°C±5°C[104 ±9])

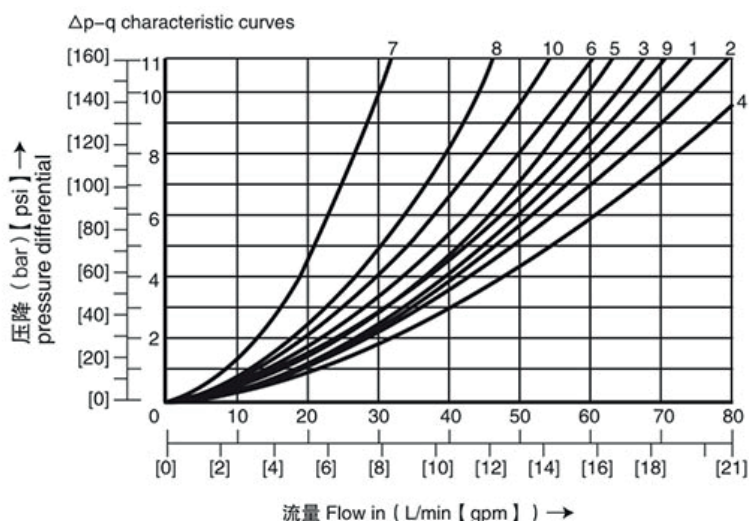




7 Spool symbol "R" in spool position B→A
8 Spool symbol "G" and "T" in central position
9 Spool symbol "H" and "T" in central position P→T

机能符号 Spool symbol	流向 Flow direction			
	P - A	P - B	A - T	B - T
A; B	3	3	-	-
C	1	1	3	1
D; Y	5	5	3	3
E	3	3	1	1
F	1	3	1	1
T	10	10	9	9
H	2	4	2	2
J; Q	1	1	2	1
L	3	3	4	9
M	2	4	3	3
P	3	1	1	1
R	5	5	4	-
V	1	2	1	1
W	1	1	2	2
U	3	3	9	4
G	6	6	9	9

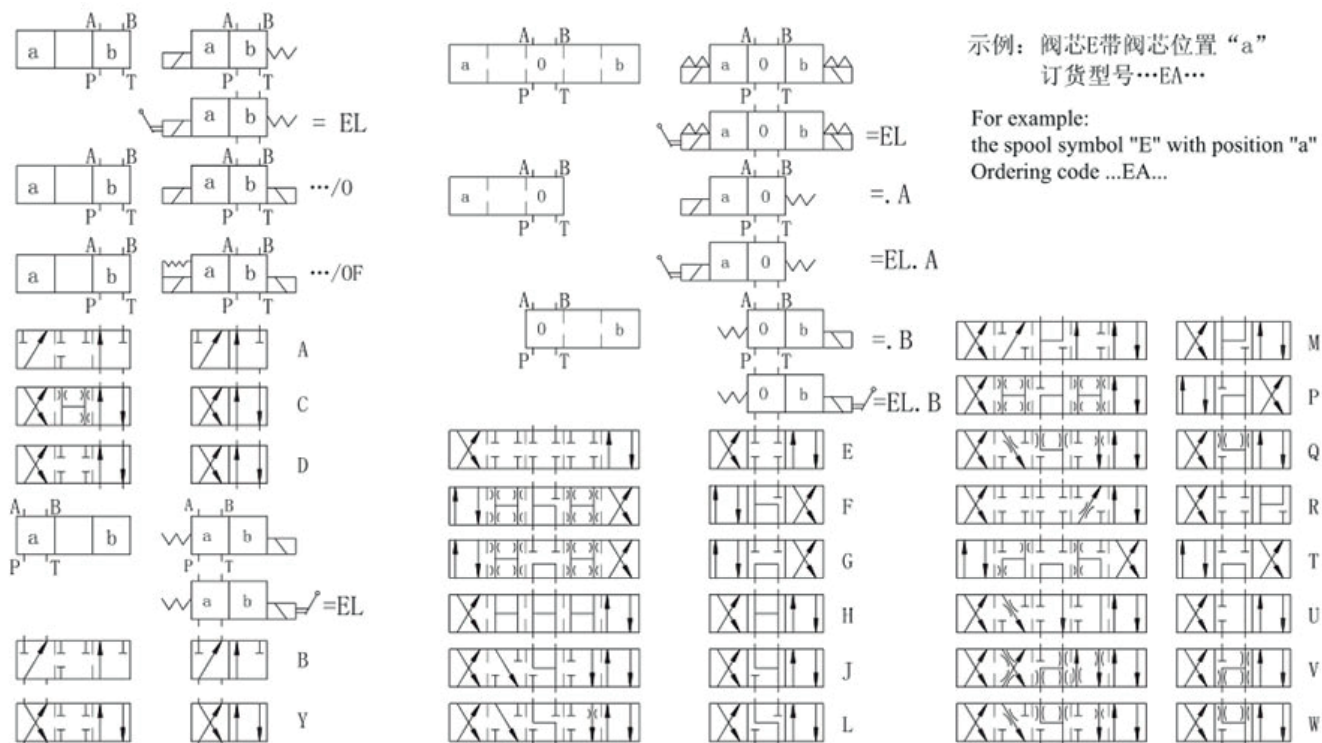

DWG6 Subplate Installation Dimensions

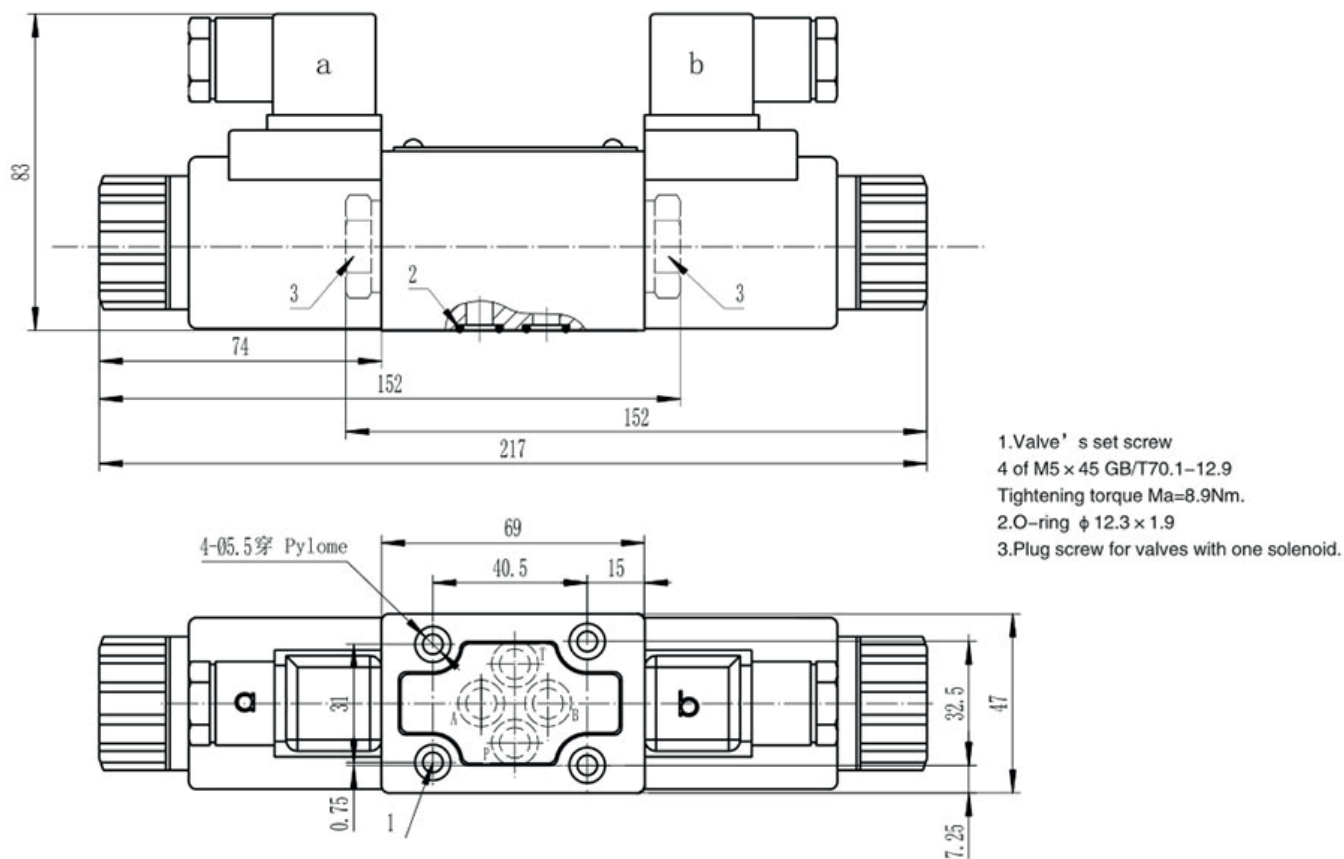

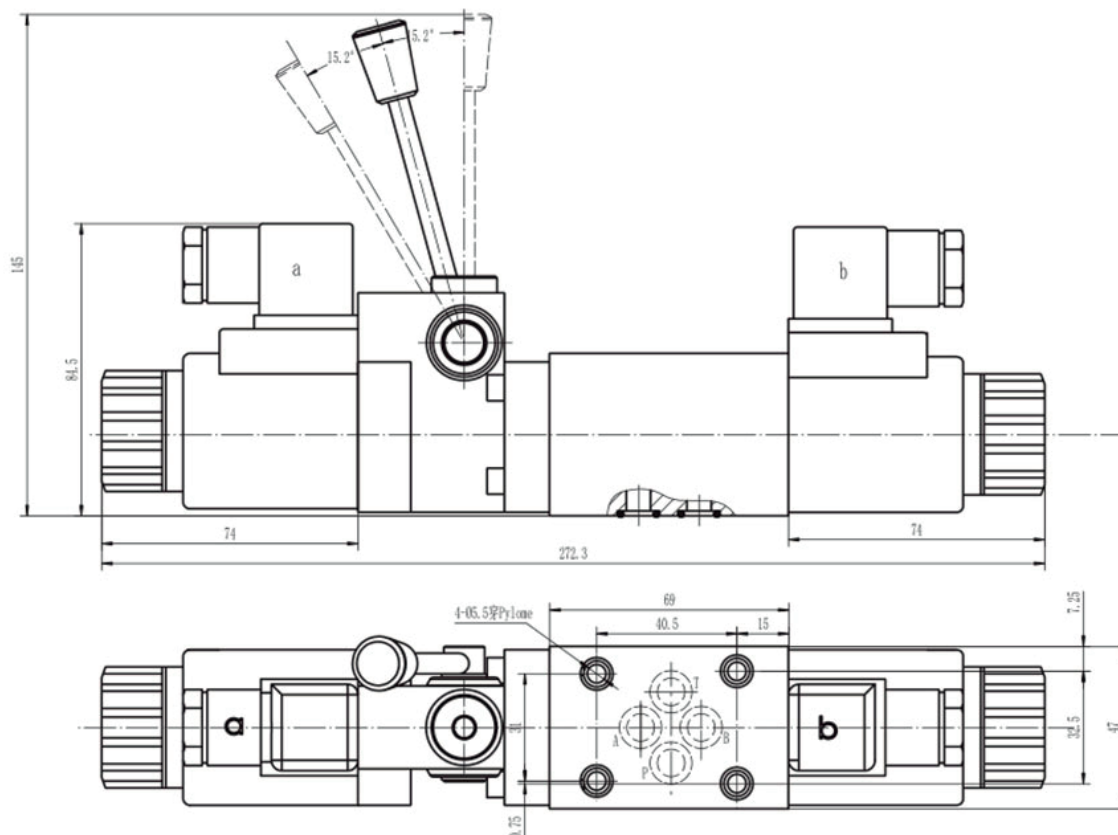

Z1DS6, Z2DS6, Z2FDS6, ZPB6, ZPR6

安装尺寸相同

Installations are the same with

Z1DS6, Z2DS6, Z2FDS6, ZPB6, ZPR6

4	DWG	6	*	E	60	*	DC24	N	Z5L	*	*	*
---	-----	---	---	---	----	---	------	---	-----	---	---	---

3=三油口

4=四油口

3=3-way

4=4-way

通径 6 Size 6

1、无=不带手动换向模块

2、EL=带手动换向模块

1.No code=Without hand lever

2.EL=With hand lever

机能符号 Spool type

系列号 60=60螺纹连接电磁铁

Series 60=60 Solenoid coils with thread connection

无=弹簧复位; O=无复位弹簧; OF=带定位器

No code=With spring return; O=Without spring return

OF=Without spring return with detent

电压 Voltage

DC12; DC24 ; AC110; AC220

For further details 附加说明

无=丁晴橡胶 V=氟橡胶

No code=NBR seals

V=FPM seals

无=无插装节流器 B0.8=节流孔径0.8

B10=节流孔径1.0; B12=节流孔径1.2

No code=Without orifice insert

B08=Orifice size 0.8mm

B10=Orifice size 1.0mm

B12=Orifice size 1.2mm

Z5L=带灯大方形插头

ZC=防水插头 JS=接线盒

Z5L=Large quadrate plug with light

ZC=Waterproof connector

JS=Wire box connector

N=有故障检查按钮; 无=没有故障检查按钮

N=With concealed manual override

No Code =Without concealed manual override

