

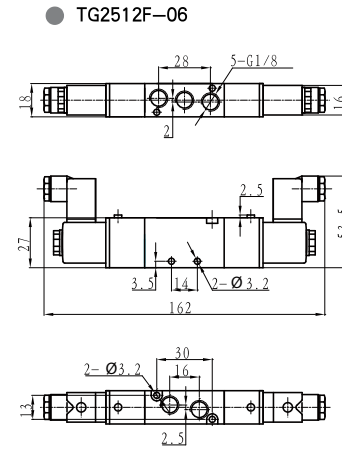
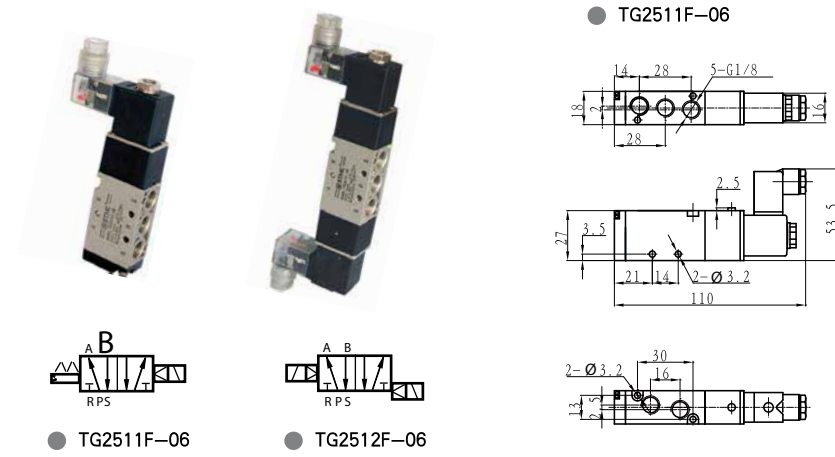


TG Series Die Cast Solenoid Valve



Die Cast 2 Positions/5 Ports Solenoid Valve

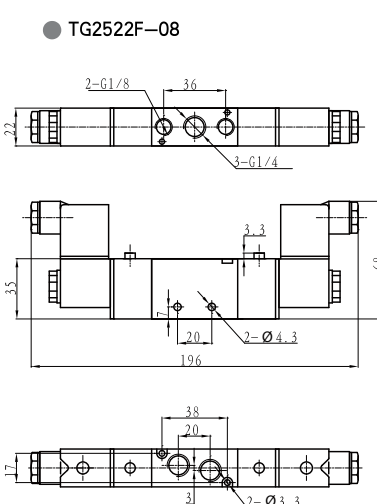


Die Cast 2 Positions/5 Ports Solenoid Valve

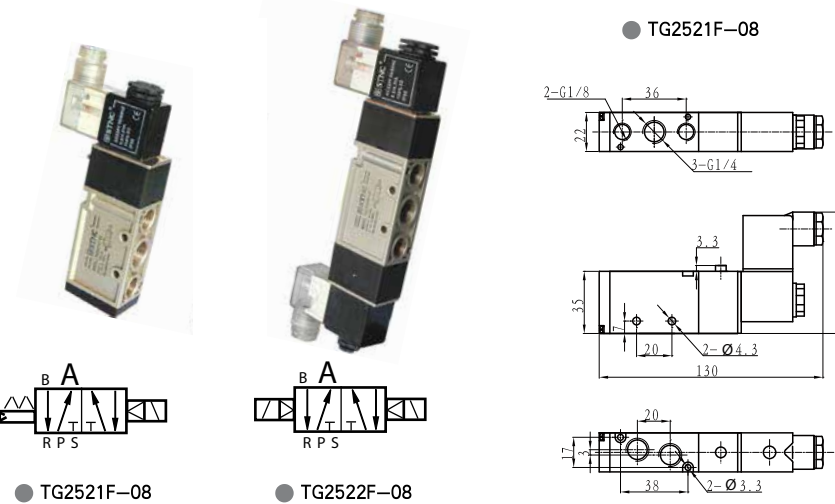

Die Cast 2 Positions/5 Ports Solenoid Valve

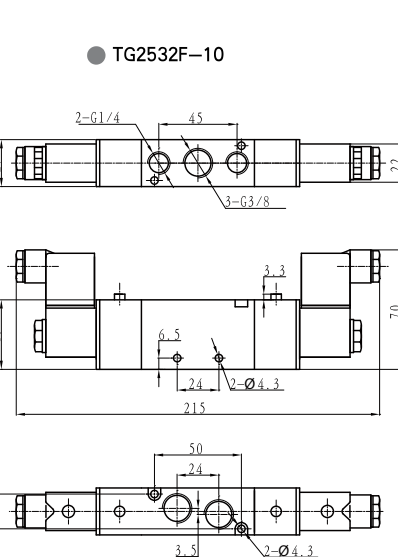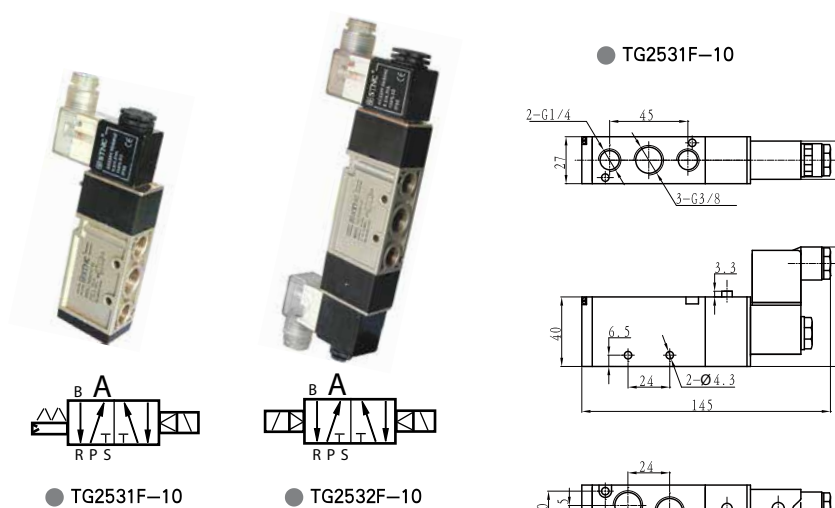

2 Positions/2 Ports, 2 Positions/3 Ports Solenoid Valve

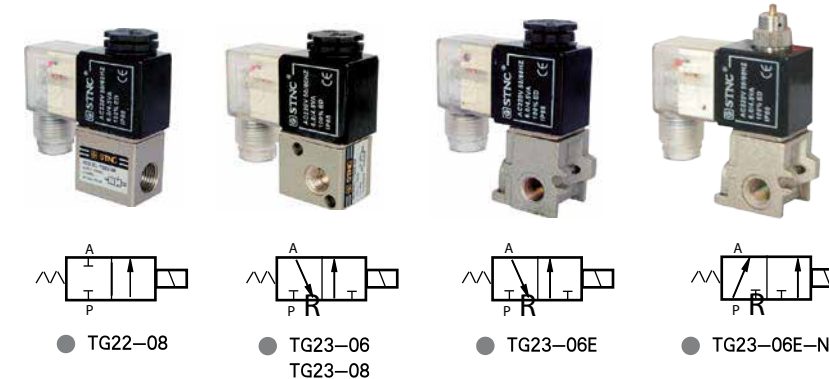


Ordering Code

TG	22	08	AC220V
Series	Function	Pipe Size	Standard Voltage
	22 : 2 Positions/2 Ports	06 : G1/8	DC24V
	23 : 2 Positions/3 Ports	08 : G1/4	AC110V
			AC220V

Technical Parameter

Item	Function	Pipe Size	Nominal Diameter (mm)	Applicable Medium	Applicable Pressure Range	Operating Method	Max Action Frequency	Lubrication	Medium Temperature
TG22-08	2 Positions/2Ports	G1/4	2.5	Air	0 ~ 0.8MPa	Internally Piloted	5 Cycles/Sec	Needless	-5 ~ 60°C
TG23-06	2 Positions/3Ports	G1/8	1.2						
TG23-08		G1/4	1.2						
TG23-06E		G1/8	1.2						
TG23-06E-NO		G1/8	1.2						

Figure Dimension

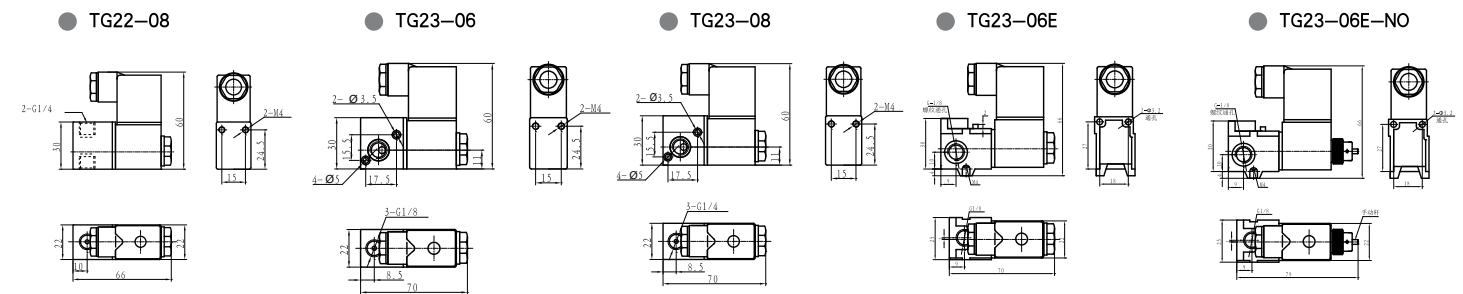


Ordering Code

TG2311D	10F
series	Mainfold no.



TG2311D-10F Weaving Combined Valve

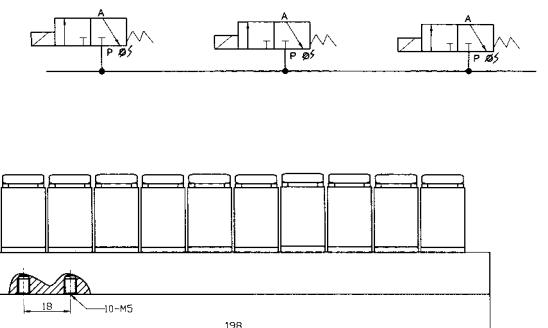

Item	Model	structure	Prot Size	Port Size (mm)	Medium	Working Pressure	Action	Frequency	Lubrication	Temperature	Voltage
	TG2311D-10F	2 way 3 Position	M5	0.8	Air	0 ~ 0.6 MPa	Directact	5 Cycles/sec	No Oil	-5°C ~ 50°C	DC24V