


Metal Örgüsüz Hortum

1995-2020



Boyutlar

Standart Hatveli

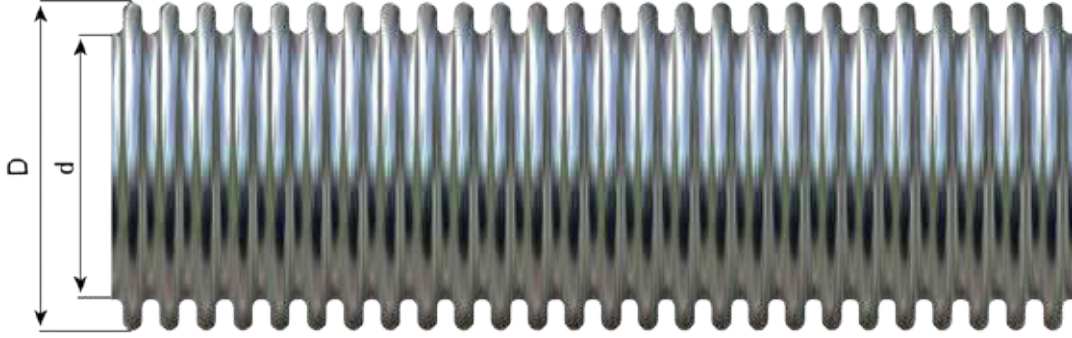

Boyutlar ve Çalışma Koşulları

DN		İç Çap	Dış Çap	d D	Basınç Dayanımı	Bükme Yarıçapı		Ağırlık (±) %10
(mm)	(inch)	d (mm)	D (mm)	tol. (±)	20 °C (bar)	Statik	Dinamik	(kg/m)
006	1/4"	6,1	9,6	0,20	25	15	75	0,06
008	5/16"	8,4	12,2	0,20	16	16	120	0,08
010	3/8"	10,1	14,3	0,20	10	18	130	0,10
012	1/2"	12,2	16,8	0,20	9,0	20	135	0,11
016	5/8"	16,2	21,8	0,20	7,0	30	145	0,17
020	3/4"	20,3	26,6	0,20	4,0	35	160	0,22
025	1"	25,4	32,2	0,30	3,0	40	185	0,33
032	1 1/4"	34,3	41,1	0,30	2,5	50	250	0,48
040	1 1/2"	40,0	49,6	0,30	2,5	60	290	0,57
050	2"	50,5	60,5	0,40	1,6	70	330	0,70
065	2 1/2"	65,5	80,0	0,60	1,5	115	400	1,05
080	3"	80,4	96,0	0,60	1,5	125	500	1,10
100	4"	100,5	117,0	0,85	1,2	165	600	1,40
125	5"	125,2	149,5	0,85	0,9	210	690	2,65
150	6"	150,6	175,5	1,50	0,9	240	830	3,25
200	8"	200,0	227,0	2,50	0,7	340	1040	4,90
250	10"	250,0	278,0	4,00	0,5	435	1200	7,60
300	12"	300,0	337,0	6,00	0,3	525	1350	11,00

Açık Hatveli



Boyutlar ve Çalışma Koşulları								
DN		İç Çap	Dış Çap	d D	Basınç Dayanımı	Bükme Yarıçapı		Ağırlık (±) %10
(mm)	(inch)	d (mm)	D (mm)	tol. (±)	20 °C (bar)	Statik	Dinamik	(kg/m)
006	1/4"	6,3	9,6	0,20	40	11	Dinamik kullanım için uygun değildir.	0,05
008	5/16"	8,4	12,2	0,20	25	15		0,06
010	3/8"	10,1	14,2	0,20	16	17		0,08
012	1/2"	12,4	16,7	0,20	16	19		0,09
016	5/8"	16,6	22,0	0,20	10	25		0,14
020	3/4"	20,4	26,0	0,20	10	30		0,16
025	1"	25,6	31,8	0,30	8,0	35		0,24
032	1 1/4"	34,0	40,7	0,30	4,0	40		0,37
040	1 1/2"	40,0	49,0	0,30	4,0	50		0,54
050	2"	50,8	59,8	0,40	3,0	60		0,60

Kapalı Hatveli



Boyutlar ve Çalışma Koşulları								
DN		İç Çap	Dış Çap	d D	Basınç Dayanımı	Bükme Yarıçapı		Ağırlık (±) %10
(mm)	(inch)	d (mm)	D (mm)	tol. (±)	20 °C (bar)	Statik	Dinamik	(kg/m)
006	1/4"	6,1	9,8	0,20	16	20	70	0,09
008	5/16"	8,2	12,4	0,20	10	25	90	0,10
010	3/8"	10,1	14,5	0,20	8,0	30	100	0,13
012	1/2"	12,1	17,0	0,20	7,0	35	110	0,15
016	5/8"	16,2	22,0	0,20	5,0	40	120	0,23
020	3/4"	20,3	26,9	0,20	4,0	50	130	0,30
025	1"	25,2	32,5	0,30	2,5	60	150	0,42
032	1 1/4"	33,7	41,2	0,30	2,0	70	230	0,60
040	1 1/2"	40,0	49,6	0,30	1,5	80	240	0,85
050	2"	49,7	60,5	0,40	1,0	100	260	0,99