


Ara Bağlantı Rakoru (Perflexli) Straight Male Stud Connector with Seal

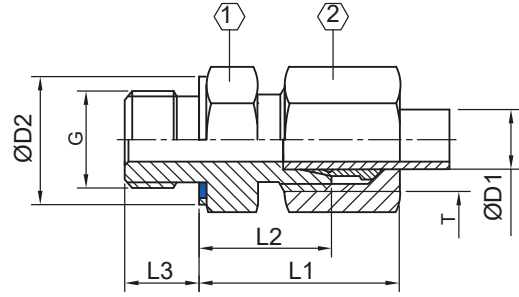

Kod Part Number	Diş Ölçüsü Thread		Boyut Ölçüleri (mm) Dimensions in (mm)							
ID No	G	T	Ø D1	L1	L2	L3	ØD2	①	②	PN Bar
HR149-S-4-6	G1/4"-19	M14x1.5	6S	28	20	12	19	19	17	400
HR149-S-4-8	G1/4"-19	M16x1.5	8S	30	22	12	19	19	19	400
HR149-S-4-10	G1/4"-19	M18x1.5	10S	31	22	12	19	19	22	400
HR149-S-4-12	G1/4"-19	M20x1.5	12S	33	24	12	19	22	24	400
HR149-S-6-10	G3/8"-19	M18x1.5	10S	31	22.5	12	22	22	22	400
HR149-S-6-12	G3/8"-19	M20x1.5	12S	33	24.5	12	22	22	24	400
HR149-S-6-16	G3/8"-19	M24x1.5	16S	36	26	12	22	27	30	400
HR149-S-8-12	G1/2"-14	M20x1.5	12S	34	25	14	27	27	24	400
HR149-S-8-16	G1/2"-14	M24x1.5	16S	37	26	14	27	27	30	400
HR149-S-8-20	G1/2"-14	M30x2	20S	40	28	14	27	32	36	400
HR149-S-12-16	G3/4"-14	M24x1.5	16S	39	29	16	32	32	30	400
HR149-S-12-20	G3/4"-14	M30x2	20S	42	31	16	32	32	30	400
HR149-S-12-25	G3/4"-14	M36x2	25S	47	35	16	32	36	46	315
HR149-S-16-20	G1"-11	M30x2	20S	42	35	18	40	41	36	315
HR149-S-16-25	G1"-11	M36x2	25S	47	35	18	40	41	46	315
HR149-S-16-30	G1"-11	M42x2	30S	50	37	18	40	46	50	315
HR149-S-20-30	G1 1/4"-11	M42x2	30S	50	37	20	50	50	50	315
HR149-S-20-38	G1 1/4"-11	M52x2	38S	57	42	20	50	55	60	315
HR149-S-24-38	G1 1/2"-11	M52x2	38S	57	42	22	55	55	60	315